

# Hydromagnetic Stability of a Self-gravitating Oscillating Fluid Cylinder

S. S. Elazab<sup>1</sup>, A. A. Hasan<sup>2,\*</sup>, Z. M. Ismail<sup>1</sup> and G. H. Zidan<sup>1</sup>

<sup>1</sup>Mathematics Department, Faculty of Women, Ain Shams University, Cairo, Egypt

<sup>2</sup>Basic and Applied Sciences Department, College of Engineering and Technology, Arab Academy for Science and Technology and Maritime Transport (AASTMT), Aswan, Egypt

Received: 10 Apr. 2023, Revised: 31 Jul. 2023, Accepted: 30 Aug. 2023.


Published online: 1 Jan. 2024.

**Abstract:** The hydro-magnetic stability of a self-gravitating oscillating medium with streams of variable velocities for fluid cylinder has been defined and investigated. The streaming is unstable, but the magnetic field has a significant stabilizing effect. Under certain conditions, the rotating forces have a stabilizing effect. Using suitable and specific conditions to distinguish between stable and unstable domains, the stability criterion is derived and investigated numerically and analytically. The effects of inertial self-gravity, and electromagnetic forces on the stability of a fluid cylinder are studied. All basic functions and equations have been solved after defining the problem.

**Keywords:** Hydro magnetic, Magnetic Field, Oscillating and Self-Gravitating

## 1 Introduction

Using suitable and specific conditions, analytically and numerically, the stability criterion is derived and discussed for the purpose of identifying the characteristics of stable and unstable domains. See Radwan [13] Moreover, Chandrasekhar [4] demonstrated the magneto-hydro-dynamic's stability of a complete fluid cylinder permeated by a homogeneous magnetic field. There are tests which were executed to determine the stability of an annular fluid jet. Also, Chandrasekhar [4] gives the classic example of a gas cylinder submerged in a liquid's capillary instability for axisymmetric perturbation. Drazin and Reid [7], Hassan [10], Elazab et al. [8], and Hassan [10] Cheng examined the unpredictability of a gas jet in a liquid that can't be compressed. However, we must point out that Cheng's results [6] are not to be taken lightly, where for all modes, the dispersion relation was valid. The axisymmetric magneto-hydrodynamic self-gravitating stability of a fluid cylinder is studied, as is the magneto-hydrodynamic stability of an oscillating fluid cylinder in the presence of a magnetic field. Discussed by Barakat. M [3]. Modes of Mehring C and Sirignano [12], axisymmetric capillary waves on thin annular liquid sheets are explored. The purpose of this research is to determine the self-gravitating stability for a confined liquid with a magnetic field, all symmetric and asymmetric perturbation modes of a fluid cylinder exist.

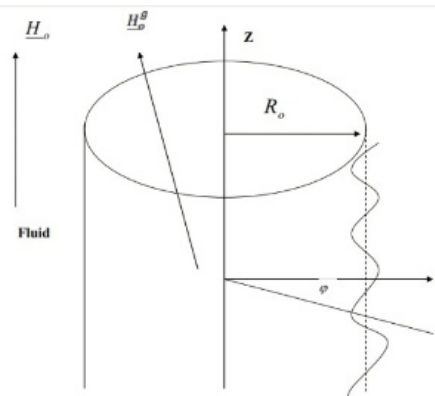

**Fig. 1:** self-gravitation Hydromagnetic cylindrical Fluid sketch.

\*Corresponding author e-mail: [alfaisal772001@aast.edu](mailto:alfaisal772001@aast.edu)

## 2 The Problem's Formation

We take into account a fluid cylinder with a uniform cross-section of (radius  $R_0$ ), the fluid is as assumed to be incompressible, non-viscous and non-dissipative of permeability coefficient. There is a uniform axial magnetic field inside the fluid, which surrounds the fluid jet and has negligible motion.

$$H_0^{(i)} = (0, 0, H_0) \quad (1)$$

While the encompassing locale outside the liquid is given by

$$H_0^{(e)} = (0, 0, \alpha H_0) \quad (2)$$

where  $H_0$  is the intensity of the magnetic field and  $\alpha$  is a parameter, the fluid is assumed to be streaming with oscillating velocity...

$$u_0 = (0, 0, U \cos \Omega t) \quad (3)$$

Where  $\Omega$  is the oscillating frequency of the fluid at  $t=0$

$U$  is the amplitude of velocity  $u_0$ .

The components of  $H_0^{(i)}$ ,  $H_0^{(e)}$  and  $u_0$  are taken into consideration along cylinder coordinates  $(r, \varphi, z)$  with the fluid cylinder's axis coincident with the  $z$ -axis. The combined force of self-gravitating, magneto dynamic, and pressure gradient forces acts on the fluid.

Concerning the current model's stability, the basic equations for that are synthesis of hydrodynamic equations and Maxwell equations

$$\rho \left[ \frac{\partial \underline{u}}{\partial t} + (\underline{u} \cdot \nabla) \underline{u} \right] = \rho \nabla V + \mu (\nabla \wedge \underline{H}) \wedge \underline{H} - \nabla p \quad (4)$$

$$\nabla \cdot \underline{u} = 0 \quad (5)$$

$$\frac{\partial \underline{H}}{\partial t} = \nabla \wedge (\underline{u} \wedge \underline{H}) \quad (6)$$

$$\nabla \cdot \underline{H} = 0 \quad (7)$$

$$\nabla^2 V = -4\pi G \rho \quad (8)$$

$$\nabla \cdot \underline{H}^{(e)} = 0 \quad (9)$$

$$\nabla \wedge \underline{H}^{(e)} = 0 \quad (10)$$

$$\nabla^2 V^{(e)} = 0 \quad (11)$$

Along the interface of fluid

$$P_s = T (\nabla \cdot \underline{N}_s) \quad (12)$$

Where

$$\underline{N}_s = \frac{\nabla f(r, \varphi, z; t)}{|\nabla f(r, \varphi, z; t)|} \quad (13)$$

Which  $u$  and  $p$  are the fluid velocity vector and kinematic pressure,  $T$  the coefficient of surface tension,  $N_s$  the unit vector normal to the fluid interface where

$$f(r, \varphi, z; t) = 0 \quad (14)$$

## 3 State of equilibrium

Equation (4) can be written as

$$\rho \left[ \frac{\partial \underline{u}}{\partial t} + (\underline{u} \cdot \nabla) \underline{u} \right] - \mu (\underline{H} \cdot \nabla) \underline{H} = -\nabla \Pi \quad (15)$$

Where

$$\Pi = p + \rho V + \frac{\mu}{2} (\underline{H} \cdot \underline{H}) \quad (16)$$

Where  $\pi$  total magneto hydrodynamic pressure. The basic equations (4)-(16) are solved with taking equations (1)-(3) in the unperturbed state and applying the boundary conditions at  $r=R_0$  we get

$$\Pi_0 = p_0 - \rho V_0 + \frac{\mu}{2} (\underline{H}_0 \cdot \underline{H}_0) = \text{const.} \quad (17)$$

$$p_{0s} = T/R_0$$

But the balance of the pressure

$$p_0 = \Pi_0 + \rho V_0 - \frac{\mu}{2} (\underline{H}_0 \cdot \underline{H}_0)$$

The self-gravitating potentials  $V_0$  and  $V_0^{(e)}$  in the equilibrium satisfy

$$\nabla^2 V_0 = -4\pi G\rho \tag{18}$$

$$\nabla^2 V_0^{(ex)} = 0 \tag{19}$$

The solutions of equations (18), (19)

$$V_0 = -\pi\rho Gr^2 + c_1 \tag{20}$$

$$V_0^{(ex)} = c_2 \ln r + c_3 \tag{21}$$

Where  $c_1, c_2$  and  $c_3$  are integration constants that must be identified in conjunction with boundary conditions.

$$c_1 = 0 \tag{22}$$

$$c_2 = -2\pi G\rho R_0^2 \tag{23}$$

$$c_3 = -\pi G\rho R_0^2 + 2\pi G\rho R_0^2 \ln R_0$$

therefore  $V_0 = -\pi G\rho r^2$  (24)

$$V_0^{(ex)} = -\pi G\rho R_0^2 \left[ 1 + 2 \ln \left( \frac{r}{R_0} \right) \right] \tag{25}$$

by balancing the pressure across the boundary surface  $r=R_0$  rating the fluid pressure  $p_0$  in the equilibrium state is given by

$$p_0 = \frac{T}{R_0} + \pi G\rho^2 (R_0^2 - r^2) + \frac{\mu}{2} (\alpha^2 - 1) H_0^2 \tag{26}$$

In the equilibrium state as  $\alpha = 1$ , we observe that there is no donating in the magnetic field, Outside of the cylinder the magnetic field becomes active.

When  $R_0 > r$ , the self-gravitating force donates to  $p_0$  in a positive manner; when  $r > R_0$ , it donates in a negative manner, and when  $r=R_0$ , it donates nothing at all.

### 4 Perturbed States

Every physical quantity  $Q(r, \varphi, z; t)$  can be developed as for minor deviations from the equilibrium state:

$$Q(r, \varphi, z; t) = Q_0(r) + \varepsilon(t) Q_1(r, \varphi, z) + \dots \tag{27}$$

where

$$Q_1 = \varepsilon_0 q_1(r) \exp(\sigma t + i(kz + m\varphi)) \tag{28}$$

the modified form of the formula in the cylindrical interface is given by

$$r = R_0 + R_1 + \dots \tag{29}$$

with

$$R_1 = \varepsilon(t) \exp(i(kz + m\varphi)) \tag{30}$$

where

$$\varepsilon(t) = \varepsilon_0 \exp(\sigma t)$$

The height of the surface wave measured from the unperterbuted state. From eq. (27) and (30) in the basic equations (4) - (14), the pertinent perturbation equations are given by

$$\rho \left[ \frac{\partial \underline{u}}{\partial t} + (\underline{u}_0 \cdot \nabla) \underline{u}_1 \right] - \mu (\underline{H}_0 \cdot \nabla) \underline{H}_1 = -\nabla \Pi_1 \tag{31}$$

Where

$$\Pi_1 = p_1 - \rho V_1 + \mu (H_0 \cdot H_1) \tag{32}$$

$$\nabla \cdot \underline{u}_1 = 0 \tag{33}$$

$$\frac{\partial H_1}{\partial t} = (\underline{H}_0 \cdot \nabla) \underline{u}_1 - (\underline{u}_0 \cdot \nabla) \underline{H}_1 \tag{34}$$

$$\nabla \cdot \underline{H}_1 = 0 \tag{35}$$

$$\nabla^2 V_1 = 0 \tag{36}$$

$$P_{1s} = -\frac{T}{R_0^2} (R_1 + \frac{\partial^2 R_1}{\partial \varphi^2} + R^2 \frac{\partial^2 R_1}{\partial z^2}) \tag{37}$$

$$\nabla \cdot \underline{H}_1^{(ex)} = 0 \tag{38}$$

$$\nabla \wedge \underline{H}_1^{(ex)} = 0 \tag{39}$$

$$\nabla^2 V_1^{ex} = 0 \tag{40}$$

every perturbed  $Q(r, \varphi, z; t)$  may be expressed as

$$Q(r, \varphi, z; t) = q_1(r) \exp(\sigma t + i(kz + m\varphi)) \tag{41}$$

by using (28), (36) and (40) given the second-order differential equation.

From Laplace equation in cylinder coordinate eq. (36) and (40) become in the form

$$V_1 = A \varepsilon_0 I_M(x) \exp(\sigma t + i(kz + m\varphi)) \tag{42}$$

$$V_1^{(ex)} = B\varepsilon_0 k_m(x) \exp(\sigma t + i(kz + m\varphi)) \quad (43)$$

From equations (38), (34) we get

$$\underline{H}_1 = \frac{ikH_0}{(\sigma + ikU \cos \Omega t)} \underline{u}_1 \quad (44)$$

by take the divergence to eq. (31) we get

$$\nabla^2 \Pi_1 = 0 \quad (45)$$

Here equation (39) means the magnetic field  $H_1^{(ex)}$  could be a scalar function  $\Psi_1^{(ex)}$

$$\underline{H}_1^{(ex)} = \nabla \Psi_1^{(ex)} \quad (46)$$

And equation (38) we get

$$\nabla^2 \Psi_1^{(ex)} = 0 \quad (47)$$

the fluid is incompressible, in viscid and irrational

$$u_1 = \nabla \Phi \quad (48)$$

combining equations (48), (33)

$$\nabla^2 \Phi_1 = 0 \quad (49)$$

From eq. (28), the variable  $\Phi_1, \pi_1$  and  $\Psi_1^{(ex)}$  then nonsingular solutions of equations (45), (47) and (49)

$$\Phi_1 = c_4 \varepsilon_0 I_m(kr) \exp(\sigma t + i(kz + m\varphi)) \quad (50)$$

$$\Pi_1 = c_5 \varepsilon_0 I_m(x) \exp(\sigma t + i(kz + m\varphi)) \quad (51)$$

$$\Phi_1^{(ex)} = c_6 \varepsilon_0 k_m(x) \exp(\sigma t + i(kz + m\varphi)) \quad (52)$$

Where  $c_4, c_5$  and  $c_6$  are constant of integration which  $I_m(kr)$  and  $k_m(kr)$  are the Bessel functions which  $m$  is the first and second type of order.

The perturbed state caused by the capillary force is the surface pressure along the cylindrical fluid interface from equation (53)

$$p_{1s} = -\frac{T}{R_0^2} (1 - m^2 - x^2) R_1 \quad (53)$$

where ( $x = kR_0$ )

## 5 Boundary Conditions

The boundary conditions of the problem must be satisfied by the sol. Of basic equations (4-14) in the unperturbed state by eqs. (1-3), (17) and (23-26) while in perturbed state given by (44) and (53)

### 5.1 Magnetic condition

It stipulates that the normal magnetic field component must remain continuous across the fluid interface.

(29) At  $r = R_0$

$$\underline{N}_0 \cdot \underline{H}_1 + \underline{N}_1 \cdot \underline{H}_0 = \underline{N}_0 \cdot \underline{H}_1^{(ex)} + \underline{N}_1 \cdot \underline{H}_0^{(ex)} \quad (54)$$

where

$$N_0 = (1, 0, 0) \quad , \quad N_1 = \left(0, \frac{-im}{R_0}, -ik\right)$$

then,

$$c_6 = \frac{i\alpha H_0}{k_m(x)} \text{ where } (x = kr) \quad (56)$$

### 5.2 Kinematic condition

The velocity of the perturbed boundary fluid interface and the normal component of the fluid's velocity  $u$  must match.

(29)

At  $r = R_0$

$$u_{1r} = (\sigma + ikU \cos \Omega t) \varepsilon_0 \exp(\sigma t + i(kz + m\varphi)) \quad (57)$$

combining eq. (57)

$$u_{1r} = \frac{\partial \Phi_1}{\partial r}$$

We get

$$c_4 = \frac{(\sigma + ikU \cos \Omega t)}{k I_m(x)} \quad (58)$$

from eq. (31), (44) we get

$$\rho \left[ \frac{\partial u_{1r}}{\partial t} + U \cos \Omega t \frac{\partial u_{1r}}{\partial z} \right] - \frac{ik\mu H_0^2}{(\sigma + ikU \cos \Omega t)} \frac{\partial u_{1r}}{\partial z} = - \frac{\partial \Pi}{\partial r} \tag{59}$$

from which we get

$$c_5 = \frac{-\rho}{kI_m^{\setminus}(x)} [\sigma^2 + 2ik\sigma U \cos \Omega t - ikU\Omega \sin \Omega t - k^2 U^2 \cos^2 \Omega t] - \frac{\mu k H_0^2}{I_m^{\setminus}(x)} \tag{60}$$

### 5.3 Self-gravitating Conditions

**(A)** The self-gravitating potential must be continuous across the equilibrium surface. At  $r=R_0$

$$V_1 + R_1 \frac{\partial V_0}{\partial r} = V_1^{(ex)} + R_1 \frac{\partial V_0^{(ex)}}{\partial r} \tag{61}$$

**(B)** The derivative of the self-gravitating potential must be continuous over the initial equilibrium's surface at  $r=R_0$

$$\frac{\partial V_1}{\partial r} + R_1 \frac{\partial^2 V_0}{\partial r^2} = \frac{\partial V_1^{(ex)}}{\partial r} + R_1 \frac{\partial V_0^{(ex)}}{\partial r} \tag{62}$$

sub. From eqs. (23), (24), (29), (42) and (43) we get

$$A=4\pi G\rho R_0 k_m(x) \tag{63}$$

$$B=4\pi G\rho R_0 I_m(x) \tag{64}$$

Finally, we have to apply some compatibility condition of the leap of the total stress in the fluid and framing  $p_{1s}$  across the fluid cylindrical interface (29) at  $r=R_0$

$$p_1 + R_1 \frac{\partial p_0}{\partial r} + \mu(H_0, H_1) - \mu(H_0, H_1)^{(ex)} = p_{1s} \tag{65}$$

The condition can be written

$$[\Pi_1 + \rho V_1] = p_{1s} - R_1 \frac{\partial p_0}{\partial r} + \mu(H_0, H_1)^{(ex)} \tag{66}$$

By sub. From equations (26),(30),(48),(42),(51),(52),(53),(63),(60),(56) into condition (66)

we get

$$\sigma^2 + 2ik\sigma U \cos \Omega t - ikU\Omega \sin \Omega t - k^2 U^2 \cos^2 \Omega t = \frac{T}{\rho R_0^3} (1 - m^2 - x^2) \frac{x I_m^{\setminus}(x)}{I_m(x)} + 4\pi G\rho \frac{x I_m^{\setminus}(x)}{I_m(x)} \left[ k_m(x) I_m(x) - \frac{1}{2} \right] + \frac{\mu H_0^2}{\rho R_0^2} \left[ -x^2 + \alpha^2 \frac{x^2 k_m(x) I_m^{\setminus}(x)}{k_m^{\setminus}(x) I_m(x)} \right] \tag{67}$$

## 6 General Discussions

Equation (67) is the dispersion relation of self-gravitating fluid cylinder (acted by mutual affected the electromagnetic and capillary forces)

implanted into a negligibly moving weak self-gravitating center.

If we put  $\Omega=0$ , eq. (67) become

$$(\sigma + ikU)^2 = \frac{T}{\rho R_0^3} \left( \frac{x I_m^{\setminus}(x)}{I_m(x)} \right) (1 - m^2 - x^2) + 4\pi G\rho \frac{x I_m^{\setminus}(x)}{I_m(x)} \left[ k_m(x) I_m(x) - \frac{1}{2} \right] + \frac{\mu H_0^2}{\rho R_0^2} \left[ -x^2 + \alpha^2 \frac{x^2 k_m(x) I_m^{\setminus}(x)}{k_m^{\setminus}(x) I_m(x)} \right] \tag{68}$$

the debate of the argument in this equation, uniform fluid streaming has a destabilizing effect, and this effect exists not only in the axisymmetric mode of perturbation ( $m=0$ ), but also in the non-axisymmetric mode ( $m \geq 1$ ).

If we put  $U=0, \Omega=0$  and  $m \geq 0$  ... eq. (67) become

$$\sigma^2 = \frac{T}{\rho R_0^3} \left( \frac{x I_m^{\setminus}(x)}{I_m(x)} \right) (1 - m^2 - x^2) + 4\pi G\rho \frac{x I_m^{\setminus}(x)}{I_m(x)} \left[ k_m(x) I_m(x) - \frac{1}{2} \right] + \frac{\mu H_0^2}{\rho R_0^2} \left[ -x^2 + \alpha^2 \frac{x^2 k_m(x) I_m^{\setminus}(x)}{k_m^{\setminus}(x) I_m(x)} \right] \tag{69}$$

If we put  $G=0, H_0 = 0$  and  $m=0$  eq. (67) become

$$\sigma^2 = \frac{T}{\rho R_0^3} \left( \frac{x I_1(x)}{I_0(x)} \right) (1 - x^2) \quad , I_0^{\setminus}(x) = I_1(x) \tag{70}$$

this is the standard capillary instability dispersion relation. If we put  $G=0, H_0 = 0, m \geq 0$

$$\sigma^2 = \frac{T}{\rho R_0^3} \left( \frac{x I_m^{\setminus}(x)}{I_m(x)} \right) \left[ I_m(x) k(x) - \frac{1}{2} \right] \tag{71}$$

this relation has been derived by Chandrasekhar (6) discussing the capillary instability of fluid cylinder.

If we put  $T=0, H_0$  and  $m = 0$ , the relation (67) become

$$\sigma^2 = 4\pi G\rho \left( \frac{x I_1(x)}{I_0(x)} \right) \left[ I_0(x) k_0(x) - \frac{1}{2} \right] \quad , I_0^{\setminus}(x) = I_1(x) \tag{72}$$

this relation (72) has been proven for the first time by Chandrasekhar and Fermi (12).

$$\sigma^2 = 4\pi G\rho \frac{x I_m'(x)}{I_m(x)} \left[ I_m(x) k_m(x) - \frac{1}{2} \right] \tag{73}$$

### 7 Numerical Discussions

In this instance of magneto hydro gravitodynamic stability caused by the interaction of capillary, self-gravitating, and electromagnetic forces, the fluid jet model is utilized. Using numbers to discuss the relation (67)...

$$\sigma^* = \gamma + \beta + w(1 - m^2 - x^2) \frac{x I_m'(x)}{I_m(x)} + \frac{x I_m'(x)}{I_m(x)} \left[ k_m(x) I_m(x) - \frac{1}{2} \right] + N x^2 \left[ -1 + \alpha^2 \frac{I_m'(x) k_m(x)}{I_m(x) k_m'(x)} \right] \tag{74}$$

where  $\gamma = \frac{-ikU\cos\Omega t}{(4\pi G\rho)^{\frac{1}{2}}}$ ,  $\beta = \frac{ikU\Omega \sin\Omega t}{4\pi G\rho}$ ,  $\sigma^* = \frac{\sigma}{(4\pi G\rho)^{\frac{1}{2}}}$ ,  $w = \frac{T}{4\pi G\rho^2 R_0^3}$

$N = \left(\frac{H_0}{H_s}\right)^2$  which  $H_s = 2\rho R_0 \sqrt{\frac{\pi G}{\mu}}$ ,


(I) For w=0.2 conformable with N=0.1,0.4,0.7,0.9 and 1.2 it is found that gravitational magneto hydrodynamic unstable domain is

$0 < x < 1.422$ ,

the contiguous stable domain are

$1.422 \leq x < \infty$ ,  $0 < x < \infty$ ,  $0 < x < \infty$ .

$0 < x < \infty$ ,  $0 < x < \infty$ .

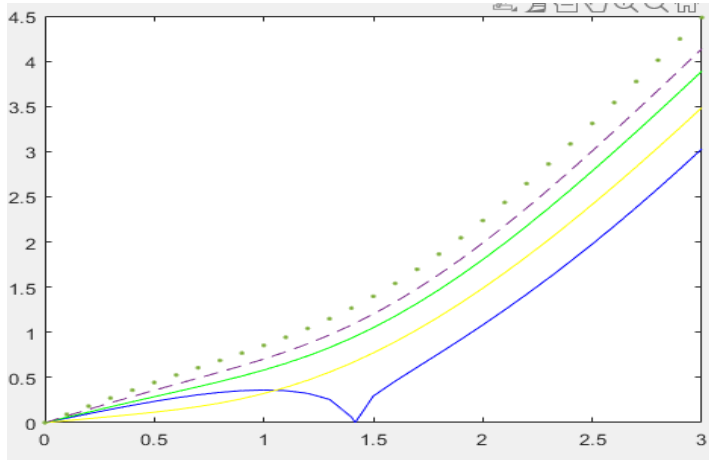

**Fig. 1:** For w=0.2 with N=0.1,0.4,0.7,0.9 and 1.2.


(II) For w=0.4 conformable with N=0.1, 0.4, 0.7, 0.9 and 1.2 it is found that gravitational magneto hydrodynamic unstable domain is

$0 < x < 1.331$ ,  $0 < x < 0.6277$

The contiguous stable domain are

$1.745 \leq x < \infty$ ,  $0 < x < \infty$ ,  $0 < x < \infty$

$0 < x < \infty$ ,  $0 < x < \infty$

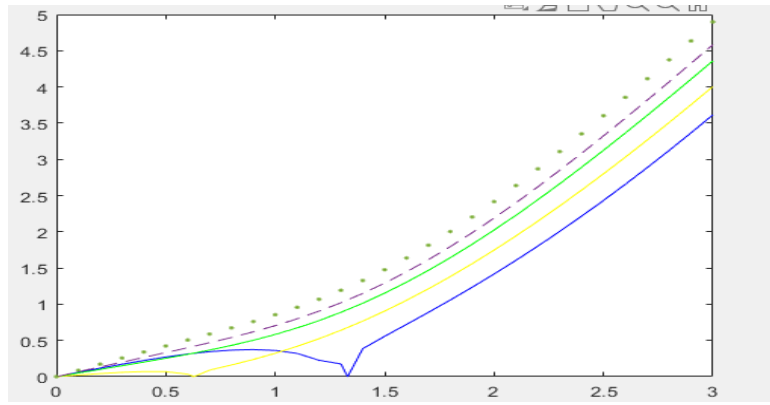

**Fig. 2:** For  $w=0.4$  with  $N=0.1, 0.4, 0.7, 0.9$  and  $1.2$

(III) For  $w=0.4, \gamma = 0.1, \beta = 0.1$  and  $N=0.1, 0.4, 0.7, 0.9$  and  $1.2$

The gravitational magneto hydrodynamic unstable domains are


$$0 < x < 1.436, \quad 0 < x < 1.030, \quad 0 < x < 0.637$$

$$0 < x < 0.536,$$

While the contiguous stable domain are

$$1.436 < x < \infty, \quad 1.030 < x < \infty, \quad 0 < x < \infty$$

$$0.536 < x < \infty, \quad 0 < x < \infty$$

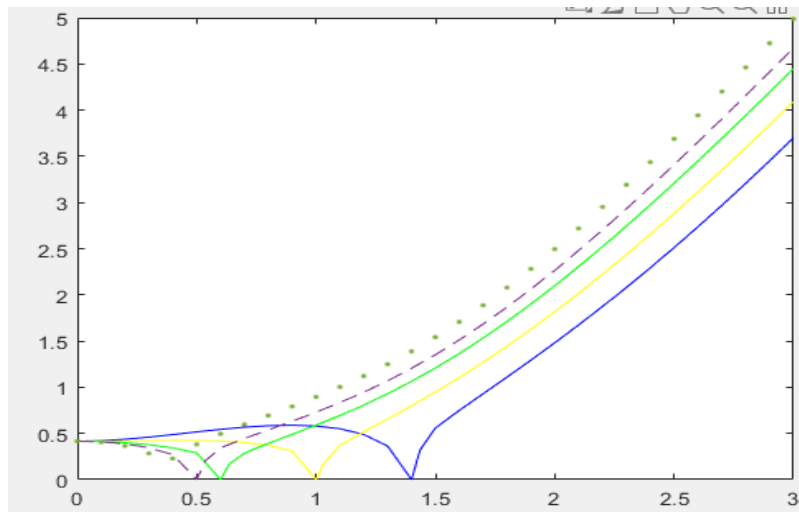

**Fig. 3:** For  $w=0.4, \gamma = 0.1, \beta = 0.1$  and  $N=0.1, 0.4, 0.7, 0.9$  and  $1.2$

(IV) For  $w=0.4, \gamma = 0.7, \beta = 0.9$  and  $N=0.1, 0.4, 0.7, 0.9$  and  $1.2$

The gravitational magneto hydrodynamic unstable domains are


$$0 < x < 1.743, \quad 0 < x < 1.544, \quad 0 < x < 1.344$$

$$0 < x < 1.148, \quad 0 < x < 1.044$$

while the contiguous stable domain are

$$1.743 < x < \infty, \quad 1.544 < x < \infty, \quad 1.344 < x < \infty$$

$$1.148 < x < \infty, \quad 1.044 < x < \infty$$

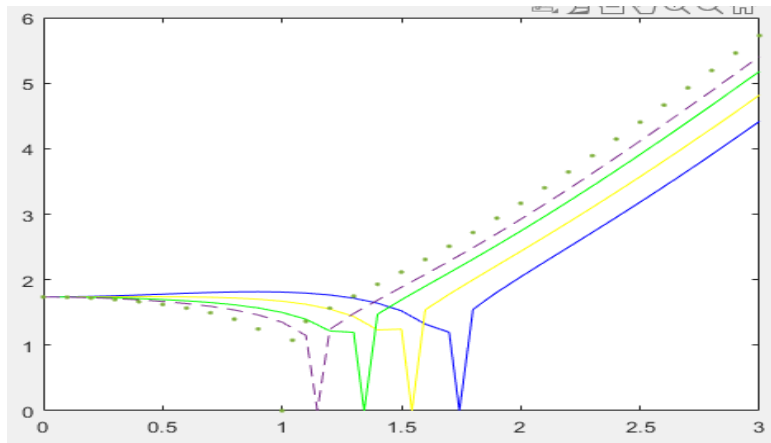

**Fig. 4:** For  $w=0.4, \gamma = 0.7, \beta = 0.9$  and  $N=0.1, 0.4, 0.7, 0.9$  and  $1.2$


(VI) For  $w=0.4, \gamma = 0.9, \beta = 1.2$  and  $N=0.1, 0.4, 0.7, 0.9$  and  $1.2$

The gravitational magneto hydrodynamic unstable domains are

$$\begin{aligned}
 &0 < x < 1.744, & 0 < x < 1.547, & 0 < x < 1.349 \\
 &0 < x < 1.248, & 0 < x < 1.143 &
 \end{aligned}$$

while the contiguous stable domains are

$$\begin{aligned}
 &1.744 < x < \infty, & 1.547 < x < \infty, & 1.349 < x < \infty \\
 &1.248 < x < \infty, & 1.143 < x < \infty &
 \end{aligned}$$

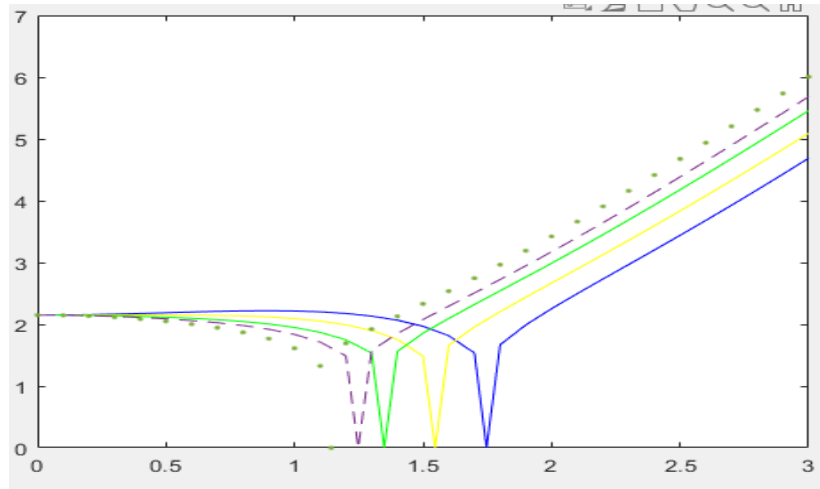

**Fig. 5:** For  $w=0.4, \gamma = 0.9, \beta = 1.2$  and  $N=0.1, 0.4, 0.7, 0.9$  and  $1.2$

### 8 Conclusions

From numerical analysis we get:

As  $N$  rises while velocity remains constant, the number of unstable domains decreases. This suggests that there is a stabilizing influence of the magnetic field.

The stable domains rise while the unstable domains shrink as  $N$  is increased with constant capillary force ( $w$ ).

The capillary force has a strong stabilizing effect on the model.

It is found that when velocity values rise, unstable domains rise for the same values of  $N$ . This explains why the streaming effect destabilizes for both short- and long-wavelength waves.

### 9 Conflict of interest

The authors declare that there is no conflict regarding the publication of this paper.



## References

- [1] Amine, Belhadj Mohammed, et al. "Magneto hydrodynamics natural convection of a triangular cavity involving Ag-MgO/water hybrid Nano fluid and provided with rotating circular barrier and a quarter circular porous medium at its right-angled corner." *Arabian Journal for Science and Engineering*, **46(12)**, 12573-12597(2021).
- [2] Barakat, H. M. "Self-Gravitating Stability of a Fluid Cylinder Embedded in a Bounded Liquid, Pervaded by Magnetic Field, for all Symmetric and Asymmetric Perturbation Modes." *J Biosens Bioelectron.*, 7.234 (2016):
- [3] Barakat, H. M. "Magneto hydrodynamic (MHD) Stability of Oscillating Fluid Cylinder with Magnetic Field." *Appl Computed Math.*, 4.6 (2015).
- [4] Chandrasekhar, Subramanian. *Hydrodynamic and hydro magnetic stability*. Courier Corporation., 2013.
- [5] Cheng, Lap Y. "Instability of a gas jet in liquid." *The Physics of fluids.*, **28(8)**,2614-2616(1985).
- [6] Chen, J. N., and S. P. Lin. "Instability of an annular jet surrounded by a viscous gas in a pipe." *Journal of Fluid Mechanics.*, 450, 235-258(2002).
- [7] Drazin, Philip G., and William Hill Reid. *Hydrodynamic stability*. Cambridge university press., 2004.
- [8] Elazab, S. S., et al. "Hydrodynamic stability of self-gravitating streaming magnetized fluid cylinder." *The European Physical Journal-Applied Physics.*, 55.1 (2011).
- [9] Chamkha, Ali J., et al. "Magneto hydrodynamic mixed convection and entropy analysis of Nano fluid in gamma-shaped porous cavity." *Journal of Thermophysics and Heat Transfer.*, **34.4**, 836-847(2020).
- [10] Hasan, AlFaisal A., and Rasha A. Abdelkhalek. "Magnetogravitodynamic stability of streaming fluid cylinder under the effect of capillary force." *Boundary Value Problems.*, **2013(1)**, 1-20(2013).
- [11] Kendall, James M. "Experiments on annular liquid jet instability and on the formation of liquid shells." *The Physics of fluids.*, **29(7)**, 2086-2094(1986).
- [12] Mehring, C., and W. A. Sirignano. "Axisymmetric capillary waves on thin annular liquid sheets. I. Temporal stability." *Physics of Fluids 12(6)*, 1417-1439(2000).
- [13] Radwan, Ahmed E., and AlFaisal A. Hasan. "Magneto hydrodynamic stability of self-gravitational fluid cylinder." *Applied Mathematical Modelling.*, **33(4)** 2121-2131(2009).
- [14] Samia S. Elazab, and Zeinab M. Ismail, "THE GRAVITATIONAL OSCILLATION OF A FLUID CYLINDER UNDER VARYING ELECTRIC FIELD." *International journal of Mathematical Archive EISSN.*, **4(10)**, 2229-5046(2013)
- [15] Samia S. Elazab, and Zeinab M. Ismail "STABILITY OF STREAMING COMPRESSIBLE FLUID CYLINDER PERVADED BY AXIAL MAGNETIC FILD AND SUROUNDED BY DIFFERENT MAGNETIC FIELD." *Jokull.*, **65(1)**, 318-330(2015).
- [16] El-azab, S. S., Hasan, A., Ismail, Z., &Zidan, G. H. Stability of Two Self-Gravitating Magneto-Dynamic Oscillating Fluids Interface. *MSA Engineering Journal.*, **2(3)**, 219-233(2023).
- [17] El-azab, S. S., Hasan, A., Ismail, Z., &Matta, M. L. Electrogravitational Oscillating Stability of Double streaming Fluids Cylinder. *MSA Engineering Journal.*, **2(3)**, 206-218(2023).
- [18] Elazab, S. S., Hasan, A. A., Ismail, Z. M., & Mohamed, R. K. *Magnetohydrodynamic Stability of Self-gravitating Streaming Fluid Cylinder*, *Information Sciences Letters An International Journal*, **12(3)**, 1249-1258 (2023).